

MULTIMEDIA FILTERS


STEEL VESSELS

MODEL	MAXIMUM FLOW (GPM)	MAX PRESS (PSIG)	FLG. INLET/ OUTLET (IN)	DIAMETER / HEIGHT (IN)	SHIPPING WEIGHT (w/ media) FILTER PACK A	SHIPPING WEIGHT (w/ media) FILTER PACK B	SHIPPING WEIGHT (w/ media) FILTER PACK C	SHIPPING WEIGHT (w/ media) FILTER PACK D
C-35	60	30	2 / 2	38 / 83	2820	2745	2570	2370
C-50	90	30	3 / 3	46 / 96	4340	4380	4290	4315
C-75	140	30	3 / 4	57 / 98	6320	6520	6470	6395
C-100	200	30	3 / 4	68 / 102	9090	9315	9190	9240
C-200	310	30	4 / 6	85 / 118	13910	14385	14360	14335
C-500S	400	100	6 / 6	96 / 113	27025	26950	25625	26550

FILTER PACK:

- A) Contains gravel and sand.
- B) Contains gravel, garnet, and sand.
- C) Contains gravel sand, and anthracite.
- D) Contains gravel, garnet, sand, and anthracite.

The CANSORB Series Modular Filters are fabricated of carbon steel and provided with a high solids epoxy lining. Where process conditions dictate, the vessels can be fabricated from other materials such as stainless steel. In addition, a different lining can be substituted for the high solids epoxy. A drain line is provided with a ball valve. The liquid collection system is designed to promote even flow distribution and thus, efficient filtration and backwashing. The liquid outlet is designed to maintain a liquid level above the media bed. The manway is 18 inches in diameter for easy access and media filling and removal. The vessels are provided with lifting lugs and fork channels. A combination rupture disc-vent assembly is available. *Specifications and properties are subject to change without notice.*

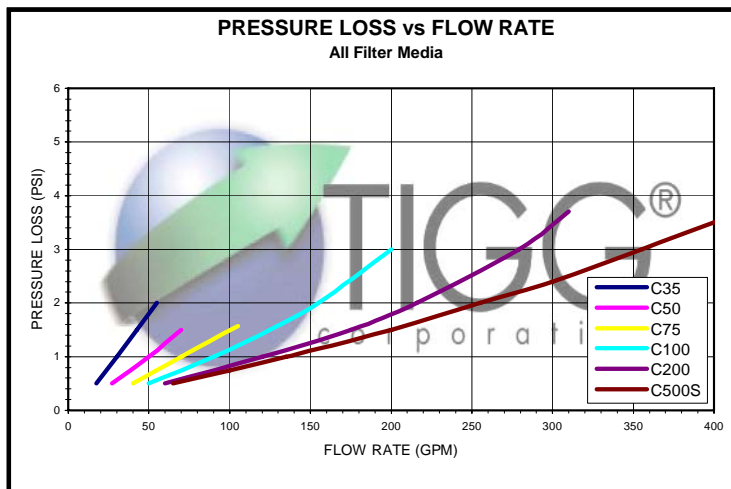

C-200 ILLUSTRATION



1 Willow Avenue
Oakdale, PA 15071
(724) 703-3020 Phone
(724) 703-3026 Facsimile
ww.tigg.com
info@tigg.com